

The ETM type B Series addresses the needs of standardized and routine testing, providing the user high quality at the most affordable price. The dual column testing systems are suited for tension and/or compression applications with load range requirements from 10N to 10kN. They are typically used for quality control and production testing.

**Typical specimens:** Small components, reinforced plastics, metals, wire, composites, elastomers, wood products, textiles, biomaterials, paper products, adhesives, foam, consumer products

### New Features

- Non-clutched drives, rated for full speed at maximum force
- Compact design saves lab space
- Wider test width

### High Quality at affordable price


- Pre-loaded ball screws and heavy duty bearings assure long life with zero backlash as well as linear low force and through zero performance. The result is accurate and repeatable measurements that truly represent the specimen characteristics rather than load frame deficiencies
- Fully-protected lead screw covers provide longer life and greater operator protection
- Easy-to-clean aluminum column covers with chamfered corners to facilitate access to the test area. T-slots are built in for simple, convenient attachment and positioning of testing accessories
- High-speed, low vibration, world-class, maintenance-free, Japanese made AC servo motor and servo controller
- Photoelectrical encoder built in servo motor system is for position measurement of crosshead
- Built-in bidirectional load cell is assembled in the middle crosshead to prevent any collisions and simple to perform compression or tension tests
- Dual action over-travel limits on all frames provide the highest level of safety and meet all international standards
- Remote control keypad facilitates test operation
- DTC-350 controller provides high speed data acquisition with 8-CH A/D converting
- Full one-year warranty on parts and labor
- Free software upgrading



## Full complement of test accessories

Extensive range of accessories to meet test requirements in almost any application or industry: plastics, metals, biomedical, composites, elastomers, components, automotive, aerospace, textiles, and more.

- Tension grip
- Peel/tear fixture
- Compression fixture
- Flexure fixture
- Film COF test fixture
- S type load cells: 10N~5kN
- Long travel extensometer
- Clip-on extensometer
- Environmental chamber
- T-slot table
- Others

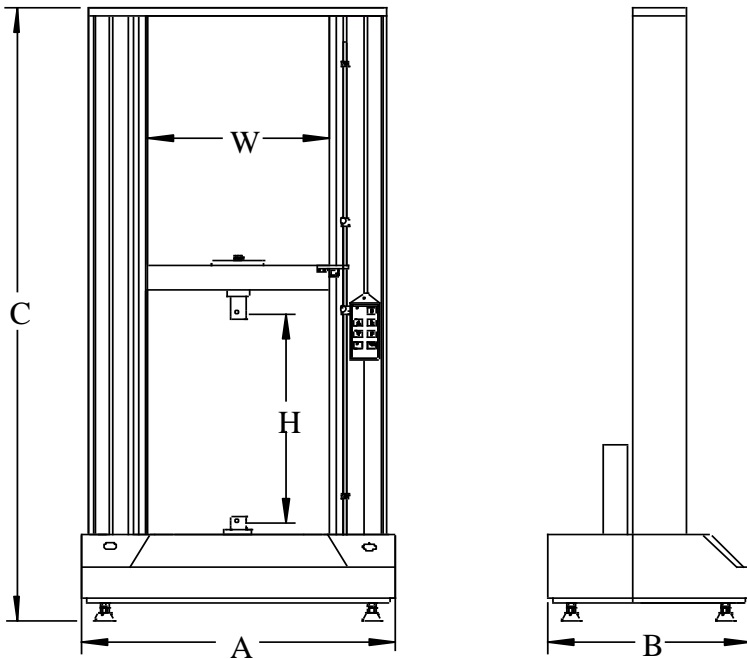

Environmental chamber

## Machine dimension:

Frame type	Width x Depth x Height A x B x C (mm)	Crosshead travel H (mm)	Test width W (mm)	Adapter (mm)	Pin (mm)
Standard	728×470×1520	1000	420	Φ20	Φ10
300mm Extended	728×470×1820	1300	420	Φ20	Φ10

## Specifications:

Model	ETM101,ETM201,ETM501,ETM102,ETM202, ETM502,ETM103,ETM203,ETM503,ETM104
Type	Type B, dual column, table-top
Capacity	10N,20N,50N,100N,200N,500N,1kN,2kN,5kN,10kN
Calibration standard	ISO 7500, Class 1 / Class 0.5
Force range	0.2% ~ 100%FS / 0.4 ~ 100%FS
Force accuracy	±1.0% / ±0.5% of reading
Force resolution	1/350000FS
Position accuracy	±0.50% of reading
Position resolution	0.027µm
Crosshead speed	0.001 ~ 500mm/min
Crosshead speed accuracy	within ±1.0% / ±0.5% of set speed
Crosshead travel	1000mm (Can be extended to 1300mm)
Test width	420mm
Dimension (WidthxDepthxHeight)	728 x 470 x 1520 (mm)
Power requirements	Single phase, AC220V±10%, 50/60Hz, 400W
Weight	100kg

## Shipping information:

Name	Standard frame	Extended frame (extra 300mm)
Package	Wooden case free of fumigation	
Crated dimension (Width x Depth x Height)	940*820*1740mm	940*820*2040mm
Crated weight	200kg	210kg
Lead time	30 working days	60 working days